


[DBPR HOME](#) | [ABOUT DBPR](#) | [DBPR DIVISIONS](#) | [CONTACT DBPR](#)

[BCIS Home](#) | [Log In](#) | [User Registration](#) | [Hot Topics](#) | [Submit Surcharge](#) | [Stats & Facts](#) | [Publications](#) | [FBC Staff](#) | [BCIS Site Map](#) | [Links](#) | [Search](#)


## Product Approval

USER: Public User

License efficiently. Regulate fairly.

[Product Approval Menu](#) > [Product or Application Search](#) > [Application List](#) > **Application Detail**

OFFICE OF THE  
SECRETARY

FL #	FL10124-R16	
Application Type	Revision	
Code Version	2014	
Application Status	Approved	
Comments		
Archived	<input type="checkbox"/>	
Product Manufacturer	GAF	
Address/Phone/Email	1 Campus Drive Parsippany, NJ 07054 (973) 872-4421 lindareith@trinityerd.com	
Authorized Signature	Beth McSorley lindareith@trinityerd.com	
Technical Representative	Beth McSorley (current)	
Address/Phone/Email	1 Campus Drive Parsippany, NJ 07054 (973) 872-4421 bmcsorley@gaf.com	
Quality Assurance Representative		
Address/Phone/Email		
Category	Roofing	
Subcategory	Asphalt Shingles	
Compliance Method	Evaluation Report from a Florida Registered Architect or a Licensed Florida Professional Engineer <input checked="" type="checkbox"/> Evaluation Report - Hardcopy Received	
Florida Engineer or Architect Name who developed the Evaluation Report	Robert Nieminen	
Florida License	PE-59166	
Quality Assurance Entity	UL LLC	
Quality Assurance Contract Expiration Date	05/14/2016	
Validated By	John W. Knezevich, PE <input checked="" type="checkbox"/> Validation Checklist - Hardcopy Received	
Certificate of Independence	<a href="#">FL10124_R16_COI_2015_01_COI_Nieminen.pdf</a>	
Referenced Standard and Year (of Standard)	<b>Standard</b>	<b>Year</b>
	ASTM D3161	2009
	ASTM D3462	2009
	ASTM D7158	2008
	TAS 107	1995
Equivalence of Product Standards Certified By		
Sections from the Code		

Product Approval Method

Method 1 Option D

Date Submitted

08/25/2015

Date Validated

08/27/2015

Date Pending FBC Approval

09/09/2015

Date Approved

10/16/2015

Summary of Products		
FL #	Model, Number or Name	Description
10124.1	GAF Asphalt Roof Shingles	Fiberglass reinforced 3-tab, laminated, 5-tab and hip/ridge asphalt shingles
<b>Limits of Use</b> <b>Approved for use in HVHZ:</b> No <b>Approved for use outside HVHZ:</b> Yes <b>Impact Resistant:</b> N/A <b>Design Pressure:</b> N/A <b>Other:</b> Refer to ER, Section 5.		<b>Installation Instructions</b> <a href="#">FL10124 R16 II 2015 08 FINAL ER GAF Asphalt Shingles FL10124-R16.pdf</a> Verified By: Robert Nieminen PE-59166 Created by Independent Third Party: Yes <b>Evaluation Reports</b> <a href="#">FL10124 R16 AE 2015 08 FINAL ER GAF Asphalt Shingles FL10124-R16.pdf</a> Created by Independent Third Party: Yes

[Back](#)[Next](#)[Contact Us :: 1940 North Monroe Street, Tallahassee FL 32399 Phone: 850-487-1824](#)The State of Florida is an AA/EEO employer. [Copyright 2007-2013 State of Florida](#). :: [Privacy Statement](#) :: [Accessibility Statement](#) :: [Refund Statement](#)

Under Florida law, email addresses are public records. If you do not want your e-mail address released in response to a public-records request, do not send electronic mail to this entity. Instead, contact the office by phone or by traditional mail. If you have any questions, please contact 850.487.1395. \*Pursuant to Section 455.275 (1), Florida Statutes, effective October 1, 2012, licensees licensed under Chapter 455, F.S. must provide the Department with an email address if they have one. The emails provided may be used for official communication with the licensee. However email addresses are public record. If you do not wish to supply a personal address, please provide the Department with an email address which can be made available to the public. To determine if you are a licensee under Chapter 455, F.S., please click [here](#).

**Product Approval Accepts:**



EXTERIOR RESEARCH & DESIGN, LLC.

Certificate of Authorization #9503

353 CHRISTIAN STREET, UNIT #13

OXFORD, CT 06478

PHONE: (203) 262-9245

FAX: (203) 262-9243

## EVALUATION REPORT

### GAF

1 Campus Drive  
Parsippany, NJ 07054

Evaluation Report 01506.01.08-R18

FL10124-R16

Date of Issuance: 01/03/2008

Revision 18: 08/24/2015

### SCOPE:

This Evaluation Report is issued under Rule 61G20-3 and the applicable rules and regulations governing the use of construction materials in the State of Florida. The documentation submitted has been reviewed by Robert Nieminen, P.E. for use of the product under the Florida Building Code and Florida Building Code, Residential Volume. The products described herein have been evaluated for compliance with the 5<sup>th</sup> Edition (2014) Florida Building Code sections noted herein.

### DESCRIPTION: GAF Asphalt Roof Shingles

**LABELING:** Labeling shall be in accordance with the requirements the Accredited Quality Assurance Agency noted herein.

**CONTINUED COMPLIANCE:** This Evaluation Report is valid until such time as the named product(s) changes, the referenced Quality Assurance documentation changes, or provisions of the Code that relate to the product change. Acceptance of this Evaluation Report by the named client constitutes agreement to notify Robert Nieminen, P.E. if the product changes or the referenced Quality Assurance documentation changes. Trinity|ERD requires a complete review of this Evaluation Report relative to updated Code requirements with each Code Cycle.

**ADVERTISEMENT:** The Evaluation Report number preceded by the words "Trinity|ERD Evaluated" may be displayed in advertising literature. If any portion of the Evaluation Report is displayed, then it shall be done in its entirety.


**INSPECTION:** Upon request, a copy of this entire Evaluation Report shall be provided to the user by the manufacturer or its distributors and shall be available for inspection at the job site at the request of the Building Official.

This Evaluation Report consists of pages 1 through 6.

### Prepared by:

**Robert J.M. Nieminen, P.E.**

Florida Registration No. 59166, Florida DCA ANE1983



The facsimile seal appearing was authorized by Robert Nieminen, P.E. on 08/24/2015. This does not serve as an electronically signed document. Signed, sealed hardcopies have been transmitted to the Product Approval Administrator and to the named client

### CERTIFICATION OF INDEPENDENCE:

1. Trinity|ERD does not have, nor does it intend to acquire or will it acquire, a financial interest in any company manufacturing or distributing products it evaluates.
2. Trinity|ERD is not owned, operated or controlled by any company manufacturing or distributing products it evaluates.
3. Robert Nieminen, P.E. does not have nor will acquire, a financial interest in any company manufacturing or distributing products for which the evaluation reports are being issued.
4. Robert Nieminen, P.E. does not have, nor will acquire, a financial interest in any other entity involved in the approval process of the product.
5. This is a building code evaluation. Neither Trinity|ERD nor Robert Nieminen, P.E. are, in any way, the Designer of Record for any project on which this Evaluation Report, or previous versions thereof, is/was used for permitting or design guidance unless retained specifically for that purpose.

## ROOFING SYSTEMS EVALUATION:

### 1. SCOPE:

**Product Category:** Roofing

**Sub-Category:** Asphalt Shingles

**Compliance Statement:** GAF Asphalt Roof Shingles, as produced by GAF, have demonstrated compliance with the following sections of the Florida Building Code and Florida Building Code, Residential Volume through testing in accordance with the following Standards. Compliance is subject to the Installation Requirements and Limitations / Conditions of Use set forth herein.

### 2. STANDARDS:

<u>Section</u>	<u>Property</u>	<u>Standard</u>	<u>Year</u>
1507.2.5, R905.2.4	Physical Properties	ASTM D3462	2009
1507.2.7.1, R905.2.6.1	Wind Resistance	ASTM D3161	2009
1507.2.7.1, R905.2.6.1	Wind Resistance	ASTM D7158	2008
1507.2.7.1, R905.2.6.1	Wind Resistance	TAS 107	1995

### 3. REFERENCES:

<u>Entity</u>	<u>Examination</u>	<u>Reference</u>	<u>Date</u>
GAF (PDM 1915)	Letter of Equivalency	Seal-A-Ridge Impact Resistant IR	01/13/2012
PRI (TST 5878)	ASTM D3462	GAF-059-02-01	09/02/2004
PRI (TST 5878)	ASTM D3462	GAF-080-02-01	05/25/2005
PRI (TST 5878)	Wind Driven Rain	GAF-407-02-01	01/21/2013
UL (TST 1740)	ASTM D3462	93NK6295	11/29/1993
UL (TST 1740)	ASTM D3462	99NK43835	01/12/2000
UL (TST 1740)	TAS 107	94NK9632	03/29/2000
UL (TST 1740)	ASTM D3462	01NK06632	02/02/2001
UL (TST 1740)	ASTM D3161, TAS 107	01NK9226	05/21/2001
UL (TST 1740)	ASTM D3161	01NK37122	12/18/2001
UL (TST 1740)	ASTM D3462	01NK37122	12/19/2001
UL (TST 1740)	ASTM D3161, TAS 107	02NK12980	04/10/2002
UL (TST 1740)	ASTM D3161, TAS 107	02NK30871	09/09/2002
UL (TST 1740)	ASTM D3161	03CA5367	03/11/2003
UL (TST 1740)	ASTM D3462	03NK26444	10/17/2003
UL (TST 1740)	ASTM D3462	04NK13850	06/07/2004
UL (TST 1740)	ASTM D3161	04NK13850	06/23/2004
UL (TST 1740)	ASTM D3161	04NK30546	03/10/2005
UL (TST 1740)	ASTM D3462	04NK22009	05/06/2005
UL (TST 1740)	ASTM D3161	04NK22009	05/09/2005
UL (TST 1740)	ASTM D3462	05NK27924	02/10/2006
UL (TST 1740)	ASTM D3161	05NK27924	02/11/2006
UL (TST 1740)	ASTM D3161, D3462	06CA18077	06/05/2006
UL (TST 1740)	ASTM D3161, D3462	06CA18074	06/16/2006
UL (TST 1740)	ASTM D3161, D3462	06CA35251	10/18/2006
UL (TST 1740)	ASTM D3462	06CA31603	12/01/2006
UL (TST 1740)	ASTM D3161, D3462	06CA41095	12/27/2006
UL (TST 1740)	ASTM D3161	07NK05228	03/13/2007
UL (TST 1740)	ASTM D3161	06CA31611	04/04/2007
UL (TST 1740)	ASTM D3161	06CA61148	04/09/2007
UL (TST 1740)	ASTM D3161, D3462	07CA31742	11/08/2007
UL (TST 1740)	ASTM D3161, D7158, D3462	08CA06100	03/13/2008
UL (TST 1740)	ASTM D3161, D3462	07CA55908	04/01/2008
UL (TST 1740)	ASTM D3161, D3462	09CA10592	03/26/2009
UL (TST 1740)	ASTM D3161, D3462	09CA06856	05/15/2009
UL (TST 1740)	ASTM D3161, D7158, D3462	09NK06647	08/01/2009



<u>Entity</u>	<u>Examination</u>	<u>Reference</u>	<u>Date</u>
UL (TST 1740)	ASTM D3161, D7158, D3462	09CA27281	08/27/2009
UL (TST 1740)	ASTM D3161, D7158, D3462	10CA35554	03/05/2010
UL (TST 1740)	ASTM D3161, D7158, D3462	10CA13686	05/15/2010
UL (TST 1740)	ASTM D3462	10CA07264	05/27/2010
UL (TST 1740)	ASTM D3462	10CA11953	10/29/2010
UL (TST 1740)	ASTM D3161, D7158, D3462	10NK11951	10/30/2010
UL (TST 1740)	ASTM D3161, D7158, D3462	10NK12070	11/04/2010
UL (TST 1740)	ASTM D3161, D7158, D3462	08CA06100	01/30/2010
UL (TST 1740)	ASTM D3161, D7158, D3462	10CA53934	03/31/2011
UL (TST 1740)	ASTM D3161, D7158, D3462	11CA48924	10/22/2011
UL (TST 1740)	ASTM D3161, D7158, D3462	11CA47919	12/03/2011
UL (TST 1740)	ASTM D3161, D7158, D3462	11CA48408	12/08/2011
UL (TST 1740)	ASTM D3161, D7158, D3462	11CA48725	12/09/2011
UL, LLC. (TST 9628)	ASTM D3462	12CA34891	10/12/2012
UL, LLC. (TST 9628)	ASTM D3161, D7158, D3462	12CA58151	02/15/2013
UL, LLC. (TST 9628)	ASTM D3161	12CA38083	02/26/2013
UL, LLC. (TST 9628)	ASTM D3161	13CA32332	06/18/2013
UL, LLC. (TST 9628)	ASTM D3161	13CA37934	08/02/2013
UL, LLC. (TST 9628)	ASTM D3161, D7158, D3462	4786875675	07/17/2015
UL, LLC. (QUA 9625)	Quality Control	Inspection Report, R21, Mobile, AL	06/19/2015
UL, LLC. (QUA 9625)	Quality Control	Inspection Report, R21, Myerstown, PA	07/21/2015
UL, LLC. (QUA 9625)	Quality Control	Inspection Report, R21, Tuscaloosa, AL	06/26/2015
UL, LLC. (QUA 9625)	Quality Control	Inspection Report, R21, Michigan Cty, IN	05/14/2015
UL, LLC. (QUA 9625)	Quality Control	Inspection Report, R21, Shafter, CA	07/16/2015
UL, LLC. (QUA 9625)	Quality Control	Inspection Report, R21, Savannah, GA	06/24/2015
UL, LLC. (QUA 9625)	Quality Control	Inspection Report, R21, Minneapolis, MN	07/14/2015
UL, LLC. (QUA 9625)	Quality Control	Inspection Report, R21, Mt. Vernon, IN	07/10/2015
UL, LLC. (QUA 9625)	Quality Control	Inspection Report, R21, Baltimore, MD	07/21/2015
UL, LLC. (QUA 9625)	Quality Control	Inspection Report, R21, Tampa, FL	06/26/2015
UL, LLC. (QUA 9625)	Quality Control	Inspection Report, R21, Dallas, TX	07/15/2015
UL, LLC. (QUA 9625)	Quality Control	Inspection Report, R21, Ennis, TX	07/09/2015
UL, LLC. (QUA 9625)	Quality Control	Inspection Report, R21, Fontana, CA	07/16/2015

#### 4. **PRODUCT DESCRIPTION:**

##### 4.1 Asphalt Shingles:

4.1.1 Marquis® WeatherMax®, Royal Sovereign® and Sentinel® are a fiberglass reinforced 3-tab asphalt roof shingles.

4.1.2 Camelot®, Camelot® II, Country Mansion® II, Glenwood™, Grand Canyon®, Grand Sequoia®, Grand Sequoia® IR, Monaco®, Sienna®, Timberline American Harvest®, Timberline® ArmorShield™ II, Timberline® Natural Shadow®, Timberline HD®, Timberline® Cool Series, Timberline Ultra HD® and Woodland® are fiberglass reinforced, laminated asphalt roof shingles.

4.1.3 Slateline® is a fiberglass reinforced 5-tab asphalt roof shingle.

##### 4.2 Hip & Ridge Shingles:

4.2.1 Seal-A-Ridge® Ridge Cap Shingles, Seal-A-Ridge® IR Impact-Resistant Ridge Cap Shingles and Timbertex® Premium Ridge Cap Shingles are fiberglass reinforced, hip and ridge asphalt roof shingles.

##### 4.3 Starter Strips:

4.3.1 Pro-Start® Starter Strip Shingles and WeatherBlocker™ Premium Eave/Rake Starter Strip are starter strips for asphalt roof shingles.

## **5. LIMITATIONS:**

- 5.1 This is a building code evaluation. Neither Trinity|ERD nor Robert Nieminen, P.E. are, in any way, the Designer of Record for any project on which this Evaluation Report, or previous versions thereof, is/was used for permitting or design guidance unless retained specifically for that purpose.
- 5.2 This Evaluation Report is not for use in the HVHZ.
- 5.3 Fire Classification is not part of this Evaluation Report; refer to current Approved Roofing Materials Directory for fire ratings of this product.
- 5.4 Wind Classification:
  - 5.4.1 The GAF asphalt shingles noted in Section 4.1 are Classified in accordance with FBC Tables 1507.2.7.1 and R905.2.6.1 to ASTM D3161, Class F and/or ASTM D7158, Class H, indicating the shingles are acceptable for use in all wind zones up to  $V_{asd} = 150$  mph ( $V_{ult} = 194$  mph). Refer to Section 6 for installation requirements to meet this wind rating.
  - 5.4.2 The GAF hip & ridge shingles noted in Section 4.2 are Classified in accordance with FBC Tables 1507.2.7.1 and R905.2.6.1 to ASTM D3161, Class F, indicating the shingles are acceptable for use in all wind zones up to  $V_{asd} = 150$  mph ( $V_{ult} = 194$  mph). Refer to Section 6 for installation requirements to meet this wind rating.
  - 5.4.3 Classification by ASTM D7158 applies to exposure category B or C and a building height of 60 feet or less. Calculations by a qualified design professional are required for conditions outside these limitations. Contact the shingle manufacturer for data specific to each shingle.
- 5.5 All products in the roof assembly shall have quality assurance audit in accordance with the Florida Building Code and F.A.C. Rule 61G20-3.

## **6. INSTALLATION:**

### **6.1 Underlayment:**

- 6.1.1 Underlayment shall be acceptable to GAF and shall hold current Florida Statewide Product Approval, or be Locally Approved per Rule 61G20-3, per FBC Sections 1507.2.3, 1507.2.4 or R905.2.3.

### **6.2 Starter Shingles:**


- 6.2.1 Installation of Pro-Start Starter Strip Shingles and WeatherBlocker Premium Eave/Rake Starter Strip shall comply with the manufacturer's current published instructions.

### **6.3 Asphalt Shingles:**


- 6.3.1 Installation of asphalt shingles shall comply with the manufacturer's current published instructions, using minimum four (4) nails per shingle in accordance with FBC Sections 1507.2 or R905.2, with the following exceptions:
  - Camelot, Camelot II, Grand Canyon, Grand Sequoia, Grand Sequoia IR, and Woodland require minimum five (5) nails per shingle.
  - Slateline requires minimum six (6) nails per shingle.
- 6.3.2 Fasteners shall be in accordance with manufacturer's published requirements, but not less than FBC 1507.2.6 or R905.2.5. Staples are not permitted.
- 6.3.3 Where the roof slope exceeds 21 units vertical in 12 units horizontal, special methods of fastening are required. Contact the shingle manufacturer for details.

#### 6.4 Hip & Ridge Shingles:

- 6.4.1 Installation of Seal-A-Ridge Ridge Cap Shingles and Seal-A-Ridge IR Impact-Resistant Ridge Cap Shingles shall comply with the manufacturer's current published instructions with a minimum two (2) nails, minimum 3/8-inch head diameter, per shingle and nominal 0.25-inch diameter beads of Henkel "Loctite PL S30 Roof & Flashing Sealant".

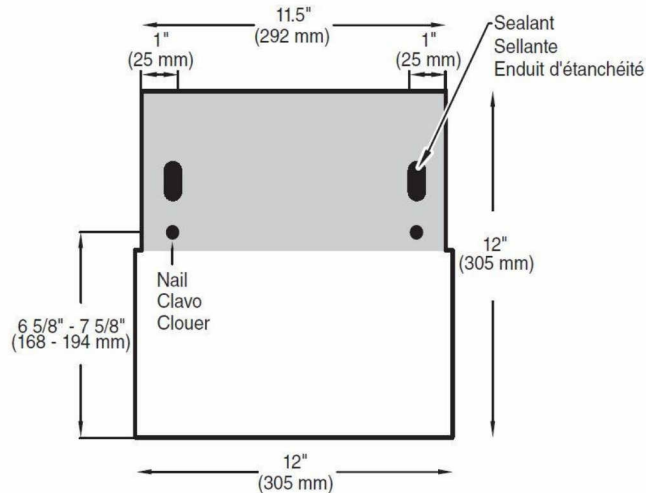

- 6.4.2 Installation of Timbertex Premium Ridge Cap Shingles shall comply with the manufacturer's current published instructions with a minimum two (2) nails, minimum 3/8-inch head diameter, per shingle and beads of Sonneborn NP1 Gun Grade Polyurethane Sealant or Henkel PL Roofing and Flashing Sealant.

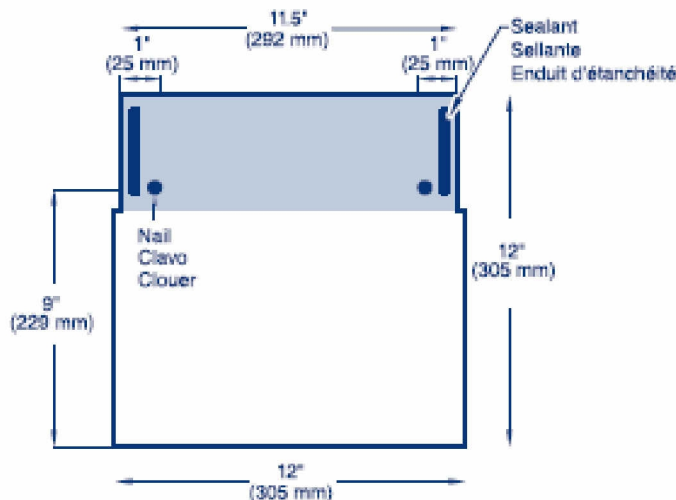

- 6.4.3 Fasteners shall be in accordance with the manufacturer's published requirements, but not less than FBC 1507.2.6 or R905.2.5. Staples are not permitted.



**7. LABELING:**

- 7.1 Labeling shall be in accordance with the requirements the Accredited Quality Assurance Agency noted herein.
- 7.2 Asphalt shingle wrappers shall indicate compliance with one of the required classifications detailed in FBC Table 1507.2.7.1 / R905.2.6.1.

**8. BUILDING PERMIT REQUIREMENTS:**

As required by the Building Official or Authority Having Jurisdiction in order to properly evaluate the installation of this product.

**9. MANUFACTURING PLANTS:**

Contact the named QA entity for information on which plants produce products covered by Florida Rule 61G20-3 QA requirements.

**10. QUALITY ASSURANCE ENTITY:**

UL LLC – QUA9625; (847) 664-3281

- END OF EVALUATION REPORT -